


Modular Centre/LCR

Left / Centre / Right On-Wall and In-wall Loudspeaker

Cabinet colour



Screen options

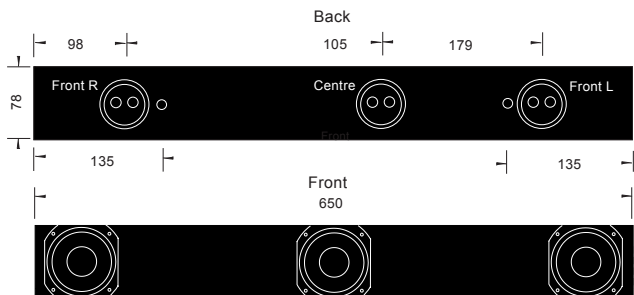

Modular Cinema Loudspeaker
Note: All dimensions are in mm.
Artcoustic can not be held
responsible for any wrong or
missing dimensions.

Side w. grille



Modular Centre/LCR

Operating Range:	100 Hz to 20 KHz
Beam width HF:	90 degrees
FR:	L & R SPL 1 Watt 86 dB Max SPL 98 dB avg 8 ohm continuous power handling 100 W
FR:	Centre SPL 1 Watt 86 dB Max SPL 98 dB avg 8 ohm continuous power handling 100 W
FR:	Rear SPL 1 Watt 86 dB Max SPL 98 dB avg 8 ohm continuous power handling 100 W
Front and Centre in parallel:	SPL 1 Watt 102dB Max SPL 108 dB avg 3.3 ohm continuous power handling 100 W
Connections:	Gold plated push terminals, single / bi, tri and quad amp, L,C,R and rear
Dimensions:	78 H x 650W x 54 D mm (With grille 68 D mm.)
Weight:	6 kg each

Modular Range Technical highlights

Full range unit:

Highly linear suspension and Low loss surrounds for high clarity and clean transient response

Copper caps for better HF extension and lower distortion

Distortion Reduced Motor

Applications

2-channel stereo
max SPL 1m 100dB max. SPL 4m 92dB

Multi Channel Home Cinema, small - medium room
max SPL 1m 100dB max SPL 4m 92dB

(Centre Channel) Home Cinema, small - medium room ,
screening room max SPL 1m 108dB max SPL 4m 98dB


Modular Cinema

Left / Centre / Right and optional Rear On-Wall and In-wall Loudspeaker

Cabinet colour



Screen options

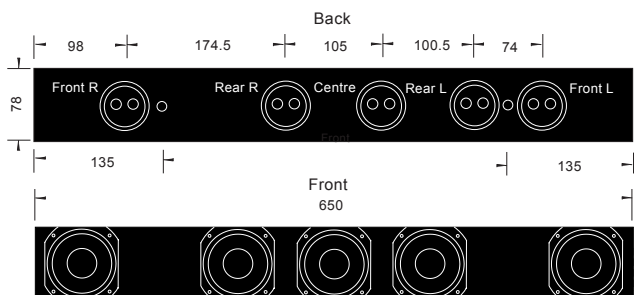

Modular Cinema Loudspeaker
Note: All dimensions are in mm.
Artcoustic can not be held
responsible for any wrong or
missing dimensions.

Side w. grille



Modular Cinema

Operating Range:	100 Hz to 20 KHz
Beam width HF:	90 degrees
FR:	L & R SPL 1 Watt 86 dB Max SPL 98 dB avg 8 ohm continuous power handling 100 W
FR:	Centre SPL 1 Watt 86 dB Max SPL 98 dB avg 8 ohm continuous power handling 100 W
FR:	Rear SPL 1 Watt 86 dB Max SPL 98 dB avg 8 ohm continuous power handling 100 W
Front and Centre in parallel:	SPL 1 Watt 102dB Max SPL 108 dB avg 3.3 ohm continuous power handling 100 W
Connections:	Gold plated push terminals, single / bi, tri and quad amp, L,C,R and rear
Dimensions:	78 H x 650W x 54 D mm (With grille 68 D mm.)
Weight:	6 kg each

Modular Range Technical highlights

Full range unit:

Highly linear suspension and Low loss surrounds for high clarity and clean transient response

Copper caps for better HF extension and lower distortion

Distortion Reduced Motor

Applications

2-channel stereo
max SPL 1m 100dB max. SPL 4m 92dB

Multi Channel Home Cinema, small - medium room
max SPL 1m 100dB max SPL 4m 92dB

(Centre Channel) Home Cinema, small - medium room ,
screening room max SPL 1m 108dB max SPL 4m 98dB

Modular Cinema 42" and 50" baffles for on-wall and in-wall installations

