

DF-Multi X2 42 inch

Left / Centre / Right Loudspeaker

Cabinet colour




Black White RAL

Screen options



Match
System

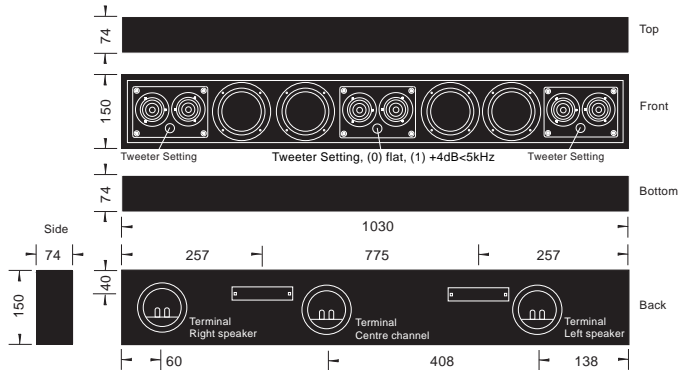

DF-Multi Loudspeaker

Note: All dimensions are in mm.
Artcooustic can not be held responsible for any wrong or missing dimensions.

DF-Multi X2

Artcooustic pioneered the concept of incorporating front left, right and centre channel speakers in one unit, and the evolution of this is the DF-Multi X2. Artcooustic's flexible design make it possible for the DF-Multi X2 to serve as either an LCR all in one, or as one high end centre channel speaker.

The DF-Multi X2 produces stunning clarity with incredible dynamics – all in the most elegant design. As an LCR it is perfect for the most discrete flat screen home cinemas. As a high end centre channel it is breathtaking! The DF-Multi X2 incorporates four 4" woofers and six rippled dome tweeters, extending the high frequency response to 40kHz at 96dB (1w +/-2dB). The DF-Multi is ideal for small to medium sized home cinema installations, and for corporate presentation facilities. The DF-Multi is the first of its kind and it is an icon of Artcooustic's innovative product development.

Applications

2-channel stereo / near field studio monitoring
max SPL 1m 105dB max. SPL 4m 97dB

Home Cinema, small - medium room
max SPL 1m 105dB max SPL 4m 97dB

(Centre Channel) Home Cinema, medium - large room ,
screening room max SPL 1m 114dB max SPL 4m 106dB

DF-Multi X2

Operating Range: 70 Hz to 40 KHz
Beamwidth HF: 90 degrees X2
FR: L & R SPL 1 Watt 89 dB Max SPL 104 dB avg 6 ohm continuous power handling 110 W
FR: Centre SPL 1 Watt 95 dB Max SPL 114 dB avg 8 ohm continuous power handling 220 W
LF: L & R Max SPL 89 dB avg 6 ohm continuous power handling 110 W
LF: Centre Max SPL 110 dB avg 8 ohm continuous power handling 220 W
HF: L & R Max SPL Switch setting (0) 106 dB, setting (1) 110 dB avg 4 ohm
HF: Centre Max SPL Switch setting (0) 110 dB, setting (1) 114 dB avg 4 ohm
continuous power handling 100 W

Centre channel, all
units in parallel: SPL 1 Watt 98dB Max SPL 114 dB avg 4 ohm continuous power handling 110 W

Connections: Gold plated push terminals, single / bi and tri amp, L,C,R.
Dimensions: 1030 H x 150 W x 74 D mm
Weight: 12 kg each