

DFC150-36 X2

Full Range 60 inch Centre Channel / Multi Purpose Loudspeaker

Cabinet colour




Black White RAL

Screen options



Match System Digital Print

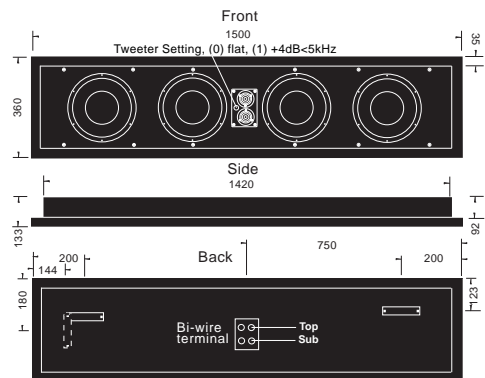

DFC150-36 X2 Loudspeaker
Note: All dimensions are in mm.
Artcoustic can not be held responsible for any wrong or missing dimensions.

The DFC150-36 X2 Centre Channel / Multi Purpose Loudspeaker

This multi purpose monitor is a scaled down version of the Artcoustic DFF180-43 X2. The DFC150-36 has been designed to match all modern 60 inch flat screen monitors and can be mounted horizontally or vertically. The The DFC150-36 X2 incorporates four 10" X2 long-throw woofers, taking the bass response down to 35Hz. At the other end of the frequency spectrum, response extends to 40kHz at 96dB (1w +/-2dB), thanks to the twin X2 rippled dome tweeters.

The DFC150-36 X2 is ideal for use in high-end installations, where sound quality is paramount, such as mid-field to full-space studio monitoring, for medium to large sized home cinema installations, and for commercial use in bars, restaurants and corporate presentation facilities.

The DFC150-36 is bi-wirable, enabling you to control the woofers and tweeters independently.

Each DFC150-36 X2 comes with 1 x PA-260 2 channel power amplifier.

Full Range 60 inch Centre Channel / Multi Purpose Loudspeaker

2.5-way Full Range Studio Monitor. 4 x 10 inch LF and MF unit, 2 x 1.5 inch 90 degree X2 HF unit. All screen options are available for the DFC150-36: The Match System / Digital Prints.

Operating Range: 35 Hz to 40 KHz
Beamwidth: HF, 90 degree X2
FR: SPL 1 Watt 95dB Max SPL 114 dB SPL avg 4 ohm continuous power handling 220 W
LF: Max SPL 116 dB SPL avg 8 ohm continuous power handling 220 W
HF: Max SPL Switch setting (0) 114 dB, setting (1) 116 dB avg 4 ohm continuous power handling 100 W
Connections: Gold plated push terminals, bi-amp
Dimensions: 1500 H x 360 W x 133 D mm
Weight: 30 kg each

Applications

2-channel stereo / mid field / fullspace studio monitoring
max SPL 1m 116dB max SPL 4m 108 dB

Home Cinema, medium - large room, screening room
max SPL 1m 116dB max SPL 4m 108dB

Restaurant - Bar - fixed installation - boardroom, auditorium
max SPL 1m 116dB max SPL 4m 108dB