

SPITFIRE Q4-3


The Spitfire Q 4-3 is the most compact model in the Q-Series, designed for installations where space efficiency and visual discretion are critical. Using a fixed quasi line-array configuration of 3-inch drivers, the Q4-3 delivers exceptional speech intelligibility, precise imaging, and tightly controlled dispersion tailored for cinema applications.

Frequency range 100 Hz to 20 kHz
 Usable LF response 97 Hz (-6 dB)
 Coverage window Horizontal 90°, Vertical 45°
 Sensitivity @ 1 Watt 98 dB
 Power handling 120 Watt
 Maximum continuous SPL @ 1 meter 114 dB
 Maximum acoustic peak SPL crest factor 6 @ 1 meter 120 dB
 Rated Impedance 4 ohms
 Weight: TBD kg
 Dimensions: H: 210 W: 280 D: 115 mm
 Cabinet: Black Satin Finish (SL) RAL/NCS Colours.



SCHEMATICS

dimensions are in mm

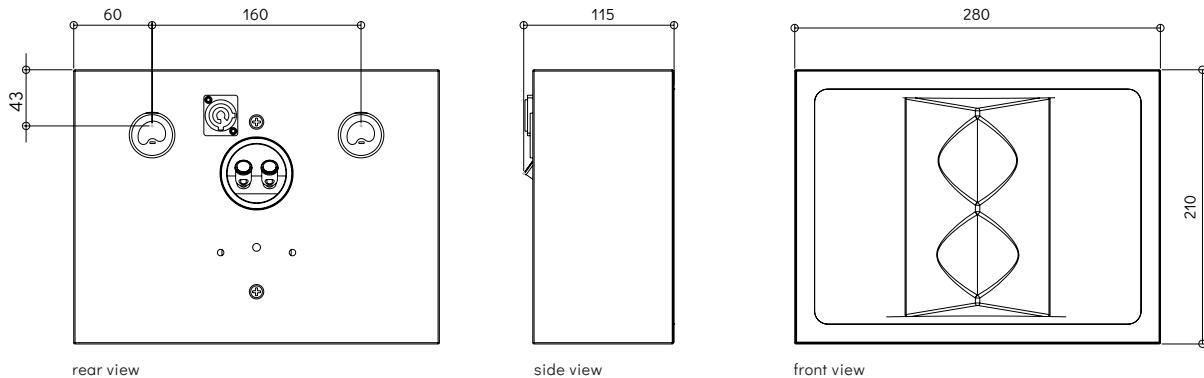

POLAR RESPONSE

