

## SPITFIRE Q4-5


The Spitfire Q4-5 represents the step into full-range performance within the Q-Series. Employing larger 5.25-inch drivers in a fixed quasi line-array configuration, the Q4-5 offers increased low-frequency extension, greater dynamic authority, and higher overall output capability compared to the smaller models.

Frequency range 50 Hz to 20 kHz  
 Usable LF response 40 Hz (-6 dB)  
 Coverage window Horizontal 90°, Vertical 40°  
 Sensitivity @ 1 Watt 99 dB  
 Power handling 400 Watt  
 Maximum continuous SPL @ 1 meter 122 dB  
 Maximum acoustic peak SPL crest factor 6 @ 1 meter 128 dB  
 Maximum acoustic peak SPL crest factor 6 @ 1 meter HPF 100Hz 131 dB  
 Rated Impedance 4 ohms  
 Weight: TBD kg  
 Dimensions: H: 500 W: 400 D: 165 mm  
 Cabinet: Black Satin Finish (SL) RAL/NCS Colours.



## SCHEMATICS

dimensions are in mm

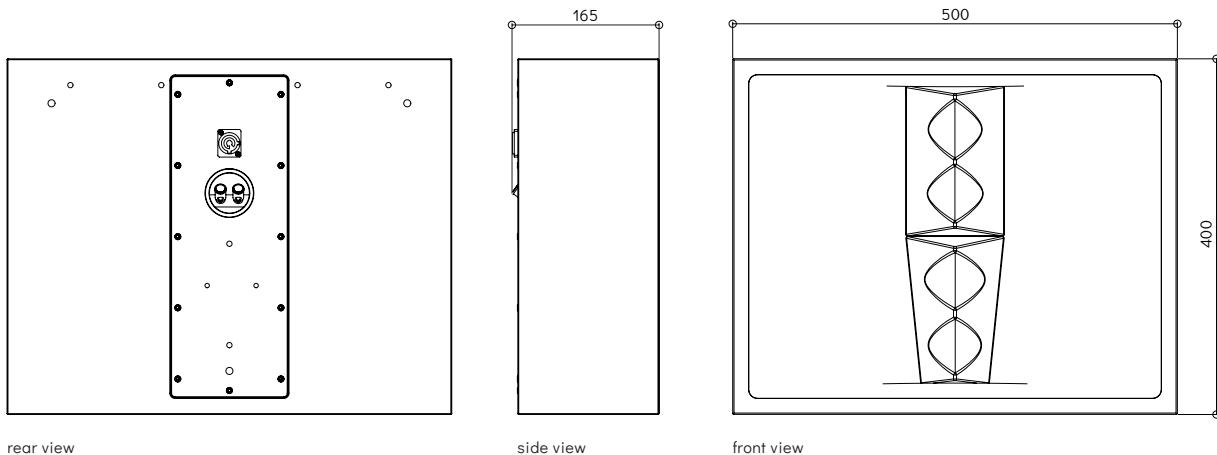

## POLAR RESPONSE

